


BHAGWAN SHAKER

LANDING BARGE

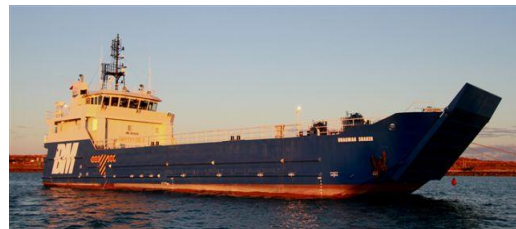

BUILT:

BUILDER, LOCATION STRATEGIC MARINE
VIETNAM
DATE MARCH 2010

FLAG:

AUSTRALIAN
PORT OF REGISTRY FREMANTLE

CLASSIFICATION:

BUREAU VERITAS – UNRESTRICTED
IMO NUMBER 9572214
CALL SIGN VNW6279

DIMENSIONS:

LENGTH OVERALL 48.47 M
BEAM 12.80 M
DEPTH MOULDED 3.2 M
DRAFT (LOADED) 2.4M OR LESS
GRT 625 T
NT 188 T
DEAD WEIGHT 550 T

MACHINERY:

MAIN ENGINES 2 x CUMMINS K19,
480 KW KEEL COOLED
ELECTRICAL GENERATION 2 x CUMMINS

SPEED AND CONSUMPTION:

FULL OPERATING 10KNOTS @ 160LTR/HR
IN PORT 300 LTRS PER DAY

CARGO DISCHARGE PUMPS:

FUEL CARGO 80 M3/HR @ 6.0 BAR
FRESHWATER 80 M3/HR @ 4.0 BAR

HULL:

STEEL
BOW RAMP CONFIGURED TO ACCOMMODATE ROLL-ON-
ROLL-OFF LOADING OF 20FT SHIPPING CONTAINERS

CAPACITIES:

MAXIMUM DECK CARGO TBA
CLEAR DECK AREA
(MAIN DECK) 27M(L) X 11M(B)
(BOW RAMP) 7M(L) X 8M(B)
DECK AREA 3252
FUEL 400,000 LTRS
WATER 291,000 LTRS
DECK LOAD RATING MAXIMUM 10T PER M2

BRIDGE:

FULLY ENCLOSED HELM POSITION
RADAR FURUNO 86NM X BAND
AIS FURUNO FA-150
GMDSS FURUNO AREA A3
GPS FURUNO GP150
DEPTH SOUNDER FURUNO FE-700
GYRO COMPASS TOKIMEC TG800/8500
AUTO PILOT SIMRAD AP150
PLOTTER
PA SYSTEM
INTERCOM
MAXSEA

ACCOMMODATION:

BERTHS FOR 9
FULLY AIRCONDITIONED

POLLUTION CONTROL:

MARPOL COMPLIANT SEWAGE TREATMENT PLANT
AND HOLDING TANK
OILY WATER SEPARATOR WITH HOLDING TANKS
FOR WASTE OIL AND DIRTY BILGE
VESSEL IS CONFIGURED FOR ZERO DISCHARGE

SAFETY, FIRE FIGHTING AND LIFESAVING EQUIPMENT;

VESSEL WILL COMPLY TO SOLAS REQUIREMENTS

Servicing The Offshore Oil & Gas Industry

ALL DETAILS PROVIDED ON THIS PAMPHLET ARE GIVEN WITHOUT GUARANTEE

CHARTER ENQUIRIES CAN BE DIRECTED TO BHAGWAN COMMERCIAL

PHONE: (08) 9965 9700 FAX: (08) 9965 4545 E-MAIL: COMMERCIAL@BHAGWANMARINE.COM.AU